

12CX800

High Output Coaxial Transducer

Key Features

- 97,5 dB SPL 1W/1m average sensitivity
- 75mm (3") LF Interleaved Sandwich Voice coil (ISV)
- 600 W continuous pink noise handling
- Horn design and profile supported by FEA computer modeling and optimized controlled coverage
- 1,4" exit HF ferrofluid treated neodymium driver
- 75mm (3") HF edgewound voice coil
- 70 degrees nominal dispersion
- Weather protected cone and plate for outdoor usage
- Ideal for compact reflex enclosures



General Description

The 12CX800 is a 12" - 1.4" coaxial transducer designed for use in compact reflex enclosures and stage monitors as small as 30 lt, with a nominal dispersion of 70 degrees.

The low profile smooth curvilinear LF cone provides a smooth response within its intended frequency range and maximum reliability under high mechanical stress.

The state-of-the-art 75 mm (3 in) LF voice coil employs our Interleaved Sandwich Voice coil (ISV) technology; a high strength fiberglass former carries windings on both the outer and inner surfaces to achieve a balanced coil with a uniform distribution of mass and motive energy. This results in an extremely linear motor assembly.


The neodymium 1.4" exit compression driver used is our ND1480 model, and a further thermal power handling capacity has been added through a specific Ferrofluid added in the gap which improves even more the thermal exchange properties. A specific dedicated horn's throat design has also been chosen by Eighteen Sound engineers, maximizing the cone's profile coupling.

The HF driver diaphragm assembly uses a high strength high temperature treated Nomex voice coil former joined directly to the titanium dome on its upper bend edge. This assures extended frequency energy transfer giving improved linearity and unparalleled reliability when compared to a usual straight former joint.

The HF motor structure utilizes a precisely machined coherent phase plug with 3 circumferential slots and a machined copper ring on the pole piece. This last feature reduces the inductance figure of frequencies above 10 kHz, improving phase and impedance linearisation.

With the increasing use of high power audio systems at outdoor events, the ability to perform in adverse weather conditions is another excellent feature of the 12CX800. This has been achieved using exclusive cone and magnet plate treatment processes which increase resistance to corrosion and make the cone water repellent.

022128CX00

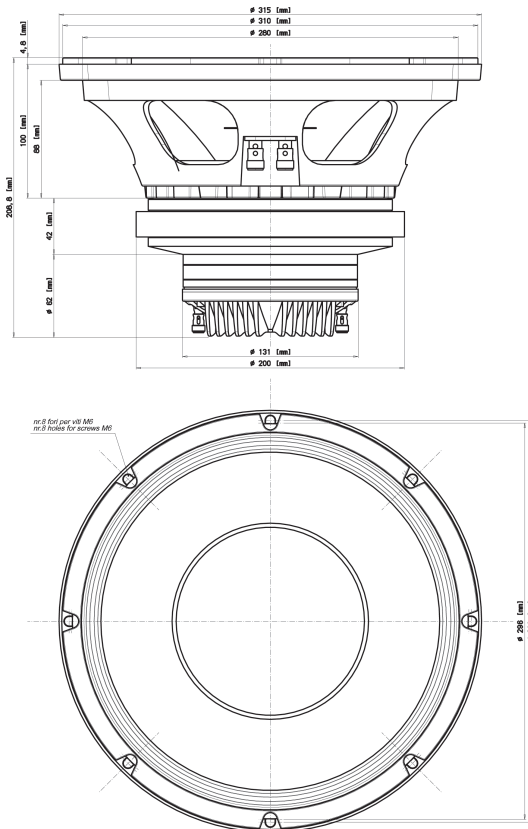

FERRITE LF-MB-MF TRANSDUCERS

12CX800

High Output Coaxial Transducer

LF GENERAL SPECIFICATIONS

NOMINAL DIAMETER	300 mm (8 in)
RATED IMPEDANCE	8 Ohm
CONTINUOUS PINK NOISE (1)	400 W
CONTINUOUS POWER (2)	300 W
PROGRAM POWER (3)	600 W
PEAK POWER (4)	1200 W
SENSITIVITY (5)	97,5 dB
FREQUENCY RANGE (6)	60 ÷ 5500 Hz
POWER COMPRESSION @-10DB (7)	0,8 dB
POWER COMPRESSION @-3DB	2,5 dB
POWER COMPRESSION @0 DB	3,2 dB
MAX RECOMM. FREQUENCY	1200 Hz
RECOMM. ENCLOSURE VOLUME	30 ÷ 60 lt. (1,1 ÷ 2,2 cuft)
MINIMUM IMPEDANCE	7 Ohm at 25°C
MAX PEAK TO PEAK EXCURSION	34 mm (1,3 in)
VOICE COIL DIAMETER	75 mm (3,00 in)
VOICE COIL WINDING MATERIAL	aluminum

HF GENERAL SPECIFICATIONS

D.C. RESISTANCE	9 Ohm
POWER HANDLING	
- CONTINUOUS PINK NOISE (8)	75 W above 2,5 kHz
- CONTINUOUS PROGRAM (9)	150 W above 2,5 kHz
SENSITIVITY (10)	108 dB
FREQUENCY RANGE	0,5 kHz ÷ 20 kHz
RECOMM. XOVER FREQUENCY	1 kHz 12 dB/oct
VOICE COIL DIAMETER	74,6 mm (3,0 in)



THIELE SMALL PARAMETERS (11)

Fs	53 Hz
Re	5,8 Ohm
Sd	0,053 sq.mt. (82,2 sq.in.)
Qms	4
Qes	0,27
Qts	0,25
Vas	73 lt. (2,6 cuft)
Mms	48 gr. (106,0 lb)
BL	18,5 Tm
Mathematical Xmax (12)	± 6,25 mm (± 0,25 in)
Le (1kHz)	1,3 mH
Ref. Effic. 1W@1m (1/2space)	4% (99 dB)

MOUNTING INFORMATION

Overall diameter	315 mm (12,4 in)
N. of mounting holes	8
Mounting holes Ø	7,15 mm (0,3 in)
Bolt circle Ø	296 - 300 mm (11,65 - 11,8 in)
Front mount baffle cutout Ø	282 mm (11,1 in)
Rear mount baffle cutout Ø	282 mm (11,1 in)
Total depth	209 mm (8,2 in)
Flange and gasket thickness	17 mm (0,7 in)
Net weight	11,4 kg (25,2 lb)
Shipping weight	12 kg (26,5 lb)
CardBoard Packaging Dim.	313x313x225 mm (12,3x12,3x8.9 in)

FREQUENCY RESPONSE CURVE OF 12CX800 MADE ON 50 LT ENCLOSURE TUNED AT 60HZ IN FREE FIELD (4PI) ENVIRONMENT. ENCLOSURE CLOSES THE REAR OF THE DRIVER. THE THIN LINE REPRESENTS HIGH FREQUENCY RESPONSE

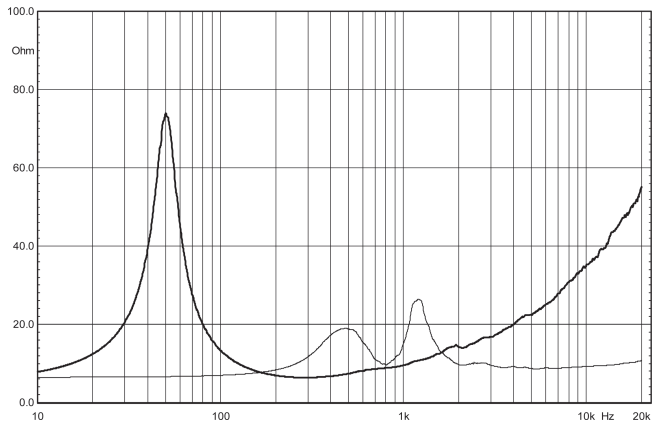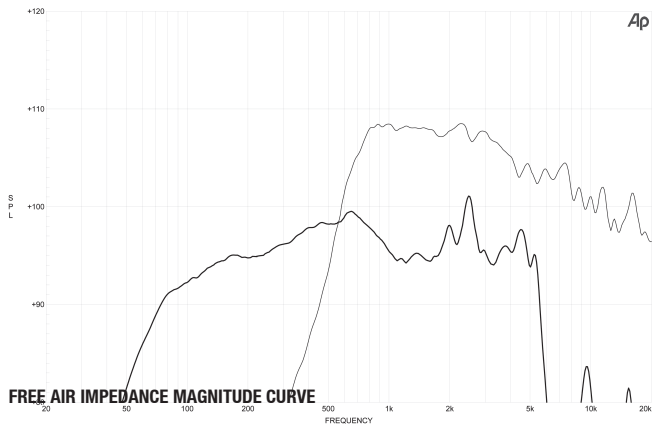

NOTES

- (1) AES standard
- (2) Continuous power rating is measured in 50 lit enclosure tuned 60Hz using a 40 - 400Hz band limited pink noise test signal applied continuously for 2 hours.
- (3) Program power rating is measured as for 2 above but 50% duty cycle.
- (4) The peak power rating is based on a 6dB crest factor above the continuous power rating and represents the maximum permitted instantaneous peak power level over a maximum period of 10ms which will be withstood by the loudspeaker without damage.
- (5) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 2,83 V sine wave test signal swept between 100Hz and 500Hz with the test specimen mounted in the same enclosure as given for 2 above.
- (6) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in 1/2 space environment.
- (7) Power compression represents the loss of sensitivity for the specified power, measured from 50-500 Hz, after a 5 min pink noise preconditioning test at the specified power.
- (8) Continuous pink noise power rating is tested with pink noise input having a 6dB crest factor for 2 hours duration within the specified range. Power calculated on rated impedance.
- (9) Continuous program power is defined as 3 dB greater than continuous pink noise and is a conservative expression of the transducer ability to handle music program material.
- (10) Sensitivity is measured on 1W input on rated impedance at 1m on axis from the mouth of the woofer and averaged in 3kHz band.
- (11) TThiele - Small parameters are measured after the test specimen has been conditioned by 400 W AES power and represent the expected long term parameters after a short period of use.
- (12) Linear Mat. Xmax is calculated as $(Hvc-Hg)/2 + Hg/4$. Hvc is the coil depth and Hg is gap depth.

Eighteen Sound engages in research and product improvement. New materials and design refinements can be introduced into existing products without notice.

