



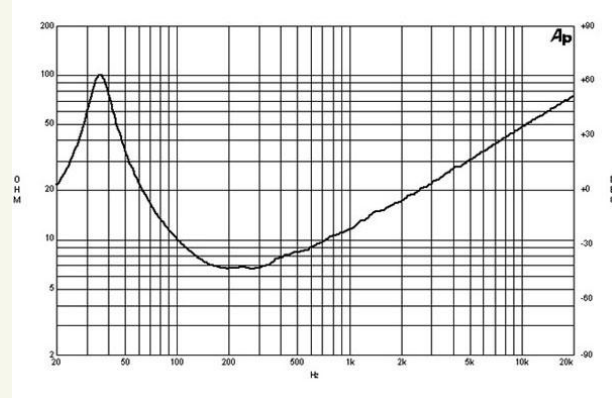

# 15NDL76 | Woofer

1000 W continuous program power capacity  
 76 mm (3 in) copper voice coil  
 40 – 2000 Hz response  
 99.5 dB sensitivity

Neodymium magnet allows a very light yet powerful motor assembly  
 Ventilated voice coil gap for reduced power compression

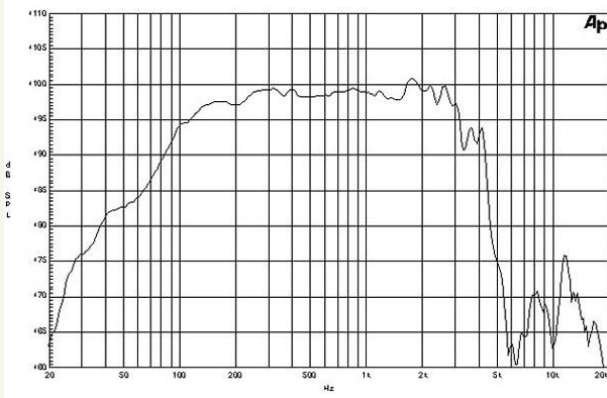

## Specification

Nominal Diameter	380 (15) mm (in)
Nominal Impedance (1)	8 Ohm
Minimum Impedance	6.7 Ohm
Nominal Power Handling (2)	500 W
Continuous Power Handling (3)	1000 W
Sensitivity (1W/1m) (4)	99.5 dB
Frequency Range	40 - 2000 Hz
Voice Coil Diameter	76 (3) mm (in)
Winding Material	Copper
Former Material	Glass Fibre
Winding Depth	17.5 (11/16) mm (in)
Magnetic Gap Depth	10.5 (0.4) mm (in)
Flux Density	1.5 T

## Thiele & Small Parameters

Fs	37 Hz
Re	5.3 Ohm
Qes	0.24
Qms	4.5
Qts	0.22
Vas	195 (6.8) dm3 (ft3)
Sd	855 (132.5) cm2 (in2)
Eta Zero	4.1 %
Xmax	+/- 7 mm
Xvar	+/- 9 mm
Mms	96 g
Bl	22.5 Txm
Le	1.5 mH

## Mounting and Shipping Info

Overall Diameter	393 mm (15.5 in)
Bolt Circle Diameter	374 mm (16.7 in)
Baffle Cutout Diameter	354 mm (13.9 in)
Depth	171 mm (6.7 in)
Flange and Gasket Thickness	16 mm (5/8 in)
Net Weight	4.6 kg (10.1 lb)
Shipping Weight	5.9 kg (13 lb)
Shipping Box	420x420x200 mm (16.5x16.5x7.9 in)

- <sup>1</sup>For different impedances, please ask.
- <sup>2</sup>2 hours test made with continuous pink noise signal (6 dB crest factor). Power calculated on rated minimum impedance.
- <sup>3</sup>Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
- <sup>4</sup>Applied RMS Voltage is set to 2.83V for 8 ohms Nominal Impedance.

LF Drivers | LF Nd Drivers | Coaxials | HF Drivers | Horns

