

FULL RANGE FREQUENCY TRANSDUCER

KEY FEATURES

- 3" full-range compact ferrite loudspeaker
- 60 W program power
- Extended response and low distortion
- Paper cone and treated cloth surround

- Steel basket
- Ideal for beam-steering application (columns), portable array and compact applications



TECHNICAL SPECIFICATIONS

| Nominal diameter | 77 mm | 3 in |
|----------------------------|---------------|------------------|
| Rated impedance | | 8 Ω |
| Minimum impedance | | 6,5 Ω |
| Power capacity 1 | 30 | W_{AES} |
| Program power ² | | 60 W |
| Sensitivity | 91 dB 1W / 1m | @ Z _N |
| Frequency range | 160 - 20.0 | 00 Hz |
| Voice coil diameter | 20,3 mm | 0,8 in |
| BI factor | 4 | ,9 N/A |
| Moving mass | 0,00 |)22 kg |
| Voice coil length | 10 | ,5 mm |
| Air gap height | | 3 mm |
| | | |

THIELE-SMALL PARAMETERS³

| Resonant frequency, f _s | 160 Hz |
|--|----------------------|
| D.C. Voice coil resistance, Re | 5,6 Ω |
| Mechanical Quality Factor, Q _{ms} | 8 |
| Electrical Quality Factor, Q _{es} | 0,52 |
| Total Quality Factor, Qts | 0,49 |
| Equivalent Air Volume to C _{ms} , V _{as} | 0,67 l |
| Mechanical Compliance, C _{ms} | 430 μ m / N |
| Mechanical Resistance, R _{ms} | 0,28 kg / s |
| Efficiency, η ₀ | 0,5 % |
| Effective Surface Area, S _d | $0,003 \text{ m}^2$ |
| Maximum Displacement, X _{max} ⁴ | 4,5 mm |
| Displacement Volume, V _d | 13,5 cm ³ |
| Voice Coil Inductance, L _e @ 1 kHz | 0,25 mH |

Notes:

¹ The power capaticty is determined according to AES2-1984 (r2003) standard.

² Program power is defined as power capacity + 3 dB.

³ T-S parameters are measured after an exercise period using a preconditioning power test. The measurements are carried out with a velocity-current laser transducer and will reflect the long term parameters (once the loudspeaker has been working for a short period of time).


 $^{^4}$ The $\rm X_{max}$ is calculated as ($\rm L_{VC}$ - $\rm H_{ag}$)/2 + ($\rm H_{ag}$ /3,5), where $\rm L_{VC}$ is the voice coil length and $\rm H_{ag}$ is the air gap height.

⁵ Product designed by Acústica Beyma S.L.





FULL RANGE FREQUENCY TRANSDUCER

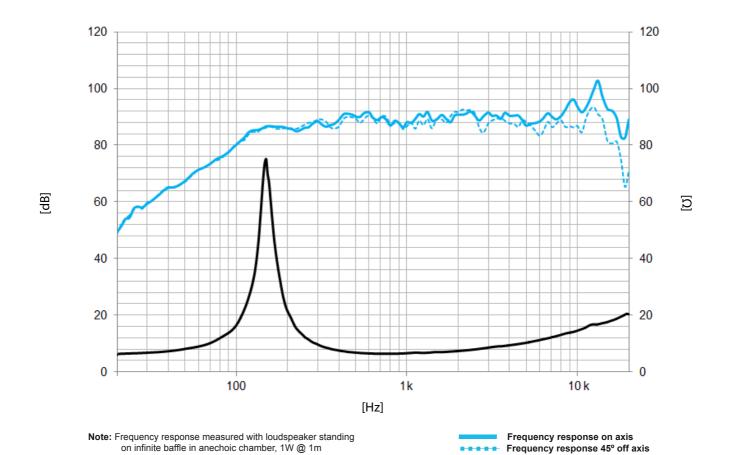

MOUNTING INFORMATION

| Overall diameter | 93,5 mm | 3,7 in |
|-------------------------|---------|--------|
| Bolt circle diameter | 85 mm | 3,4 in |
| Baffle cutout diameter: | | |
| - Front mount | 75,9 mm | 3,0 in |
| Depth | 46 mm | 1,8 in |
| Net weight | 0,57 kg | 1,2 lb |
| Shipping weight | 0,70 kg | 1,5 lb |

DIMENSION DRAWING

