

# 18NBX100

## LF Drivers - 18.0 Inches



2400 W continuous program power capacity

100 mm (4 in) split winding copper voice coil

35 - 1000 Hz response

96 dB sensitivity

57 mm peak-to-peak excursion before damage

Double silicone spider with optimized compliance

Ventilated voice coil gap for reduced power  
compression

Aluminium demodulating ring for very low distortion

## Specifications

Nominal diameter	460 mm (18.0 in)
Nominal impedance	8 Ω
Minimum impedance	6.0 Ω
Nominal power handling <sup>1</sup>	1200 W
Continuous power handling <sup>2</sup>	2400 W
Sensitivity (1W/1m) <sup>3</sup>	96.5 dB
Frequency range	35 - 1000 Hz
Voice coil diameter	100 mm (4.0 in)
Winding material	Copper
Former material	Glass Fibre
Winding depth	25 mm (1.0 in)
Magnetic gap depth	11 mm (0.43 in)
Flux density	1.1 T

## Design

Surround shape	Triple Roll
Cone shape	Radial
Magnet material	Neodymium Ring

## Design

Spider	Double Silicone
Pole design	T-Pole
Woofer cone treatment	TWP Waterproof Both Sides
Recommended enclosure	200.0 dm <sup>3</sup> (7.1 ft <sup>3</sup> )
Recommended tuning	35 Hz

## Parameters<sup>4</sup>

Fs	35 Hz
Re	5.2 Ω
Qes	0.4
Qms	5.6
Qts	0.38
Vas	198.0 dm <sup>3</sup> (7.0 ft <sup>3</sup> )
Sd	1210.0 cm <sup>2</sup> (187.6 in <sup>2</sup> )
η <sub>o</sub>	2.0 %
Xmax	10.0 mm
Xvar	12.0 mm
Mms	217 g
Bl	24.8 Txm

## Parameters

Le	1.85 mH
EBP	87 Hz


## Mounting And Shipping Info

Overall diameter	460 mm (18.0 in)
Bolt circle diameter	440 mm (17.3 in)
Baffle cutout diameter	422.0 mm (16.6 in)
Depth	208 mm (8.19 in)
Flange and gasket thickness	14 mm (0.55 in)
Air volume occupied by driver	8.5 dm <sup>3</sup> (0.3 ft <sup>3</sup> )
Net weight	9.3 kg (20.5 lb)
Shipping units	1
Shipping weight	10.8 kg (23.81 lb)
Shipping box	500x500x250 mm (19.7x19.7x9.8 in)

## Service Kit

RCK18NBX1008

- 2 hours test made with continuous pink noise signal (6 dB crest factor) within the range Fs-10Fs. Power calculated on rated minimum impedance. Loudspeaker in free air.
- Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
- Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.
- Thiele-Small parameters are measured after a high level 20 Hz sine wave preconditioning test.

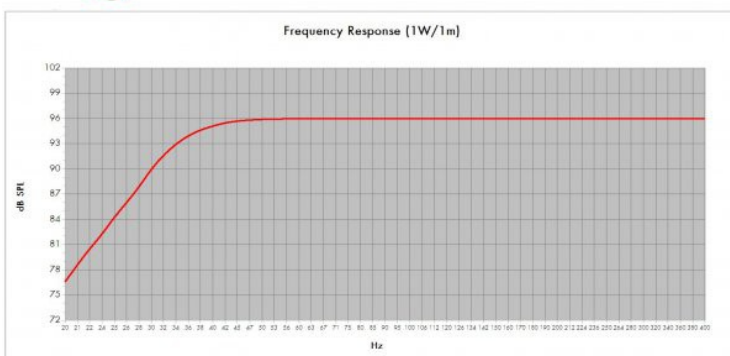

Model:	18NBX100	
Enclosure Type:	Bass Reflex	Configuration: One Driver
Internal Net Volume [liters]:	200	GS: 7
Tuning Frequency (Hz):	35	Port Area [cm <sup>2</sup> ]: 333.5
Frequency (-3 dB) (Hz):	34.2	Port Length [cm]: 22.9