


Custom Vented Box Design

By karsten, cad



Box Properties

--Description--

Name: 1x15 sub comparison

Type: Vented Box

Shape: Prism, square

Finish: black warnex

Veneer: 15mm birch ply

--Box Parameters--

Vb = 109,9 liters

V(total) = 114,9 liters

Fb = 47, Hz

F3 = 47,47 Hz

Fill = minimal

--Vents--

No. of Vents = 1


Vent shape = rectangle

Vent ends = one flush

Hv = 50, mm

Wv = 425, mm

Lv = 177, mm

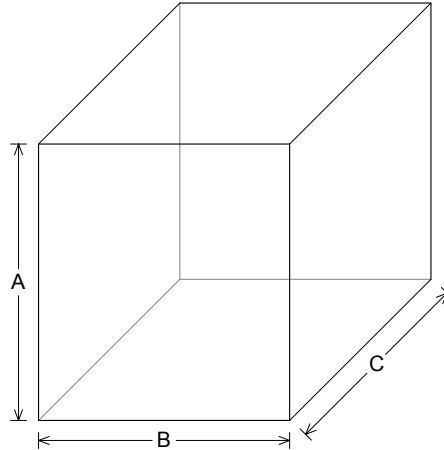

--External Dimensions--

A = 550, mm

B = 500, mm

C = 530, mm

--Internal Dimensions--

A = 520, mm

B = 470, mm

C = 470, mm

--Wall Thickness--

Front = 45, mm

Side = 15, mm

Driver Properties

--Description--

Name: 15H

Type: Standard one-way driver

Company: D.A.S. Audio, S.A.

Comment: H series

Suspension: Polycotton surround and spider.

Frame: Cast aluminum basket.

Voice Coil: 4 inch edgewound voice coil. Fiberglass former.

Terminals: 4 mm push terminals.

Magnet: Anisotropic barium ferrite magnet. Vented.

--Configuration--

No. of Drivers = 1

--Driver Parameters--

Fs = 35, Hz

Qms = 6,541

Vas = 203, liters

Xmax = 6, mm

Sd = 860, sq.cm


Qes = 0,303

Re = 6,1 ohms

Le = 1,19 mH

Z = 8, ohms

Pe = 600, watts

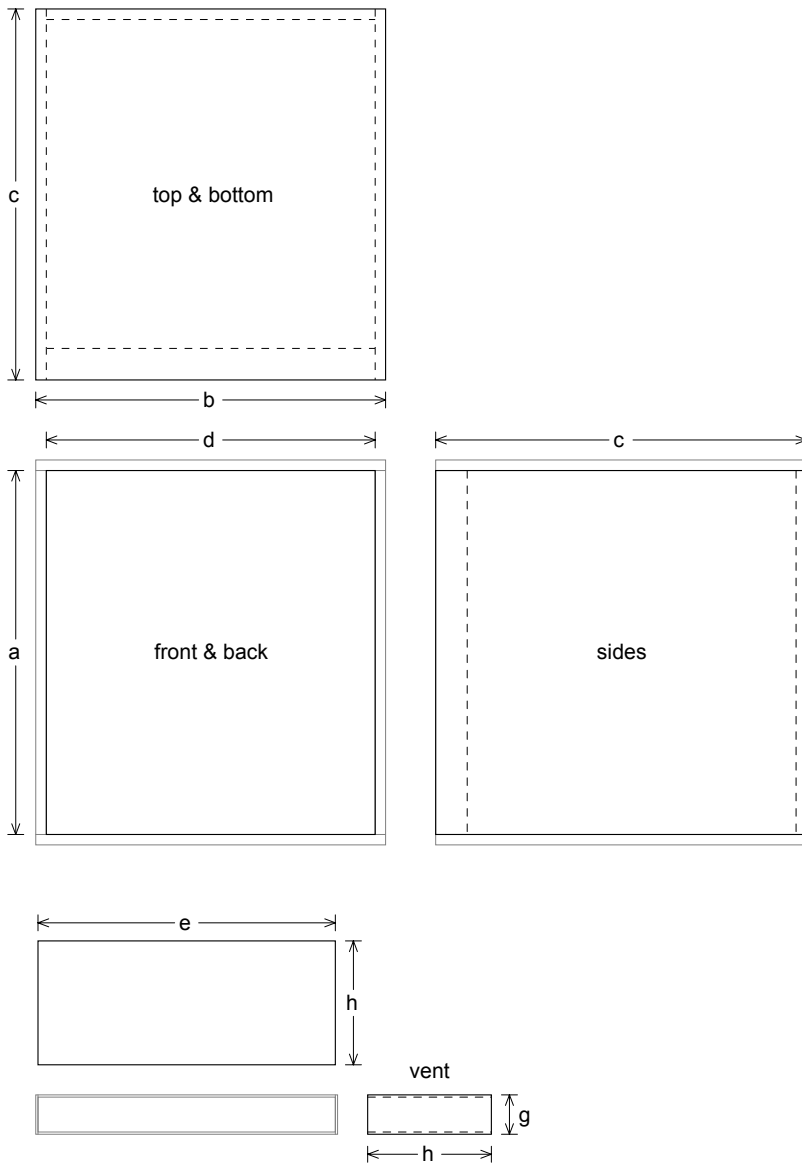

Box Parts

Box Shape: Square Prism

1 Top, 1 Bottom: depth (c) = 530, mm
width (b) = 500, mm, thickness = 15, mm

1 Front: height (a) = 520, mm
width (d) = 470, mm, thickness = 45, mm

1 Back: height (a) = 520, mm
width (d) = 470, mm, thickness = 15, mm

2 Sides: height (a) = 520, mm
depth (c) = 530, mm, thickness = 15, mm

--Driver Mounting--
Mounting: Flush

--Vent Parts--

1 Top, 1 Bottom:
width (e) = 425, mm, length (h) = 177, mm
thickness = 3,175 mm

2 Sides:
height (g) = 56,35, mm, length (h) = 177, mm
thickness = 3,175 mm

