





HP170G0

Impedance	6 ohms	V.C. Diameter	25 mm
Fs	51.6 Hz	V.C. Length	11 mm
RMS Power (iec)	45 W	V.C. Former	aluminum
Sensitivity (2.83V/1m)	88.6 dB	V.C. Layers	4
Re	5.6 ohms	Wire Type	round
Le	1.14 mH	BL	7.32 NA-1
Xmax	± 3.5 mm	Mms	14.18 gr
Qms	2.37	Cone	treated paper
Qes	0.48	Surround	rubber
Qts	0.40	Frame	polymer
Vas	16.57 l	Net weight	0.72 kg

Response Curves

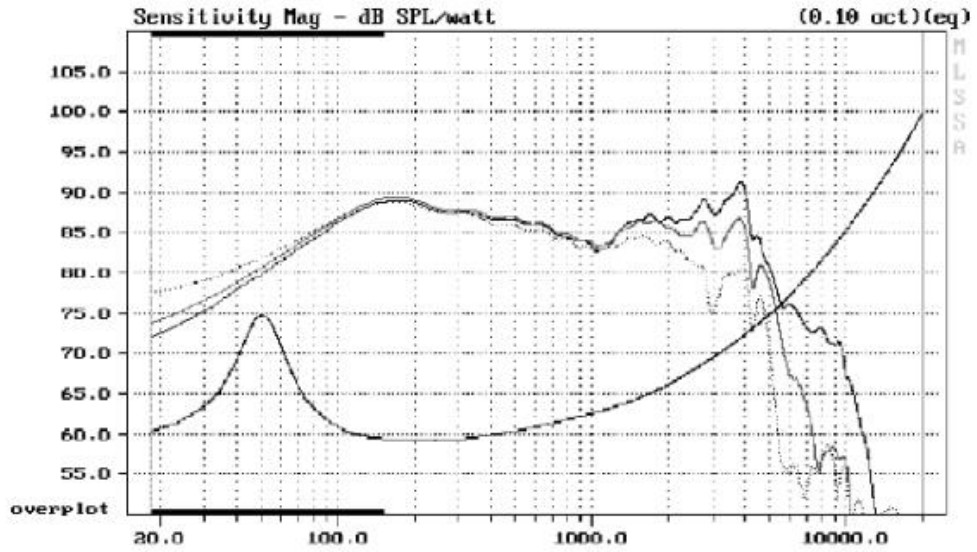

Spectral Decay Plot

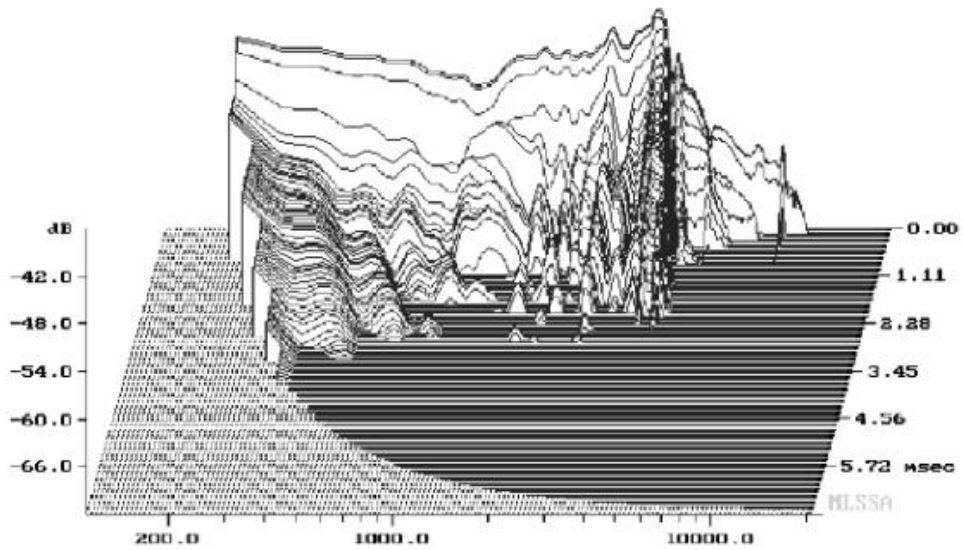

Dimensions in mm

