

MLSSA SPO 4WA #981215-1353-3640 for Audax Industries

Line	Parameter	Measured Parameters			QC Limits		Result
		Value	Units	Nominal	Min	Max	
1	RMSE-free	0.82	Ohms	0.82	0.00	0.00	
2	Fs	1126.02	Hz	1126.02	0.00	0.00	
3	Re	6.11	Ohms[dc]	6.11	0.00	0.00	
4	Res	17.17	Ohms	17.17	0.00	0.00	
5	Qms	1.52		1.52	0.00	0.00	
6	Qes	0.54		0.54	0.00	0.00	
7	Qts	0.40		0.40	0.00	0.00	
8	L1	-0.01	mH	-0.01	0.00	0.00	
9	L2	0.09	mH	0.09	0.00	0.00	
10	R2	-20.00	Ohms	-20.00	0.00	0.00	
11	RMSE-load	0.82	Ohms	0.82	0.00	0.00	
12	Uas(Sd)	--	liters	0.00	0.00	0.00	
13	Mms	--	grams	0.00	0.00	0.00	
14	Cms	--	µM/Newton	0.00	0.00	0.00	
15	B1	--	Tesla-M	0.00	0.00	0.00	
16	SPLref(Sd)	--	dB[Re]	0.00	0.00	0.00	
17	Rub-index	0.02		0.02	0.00	0.00	

Method: Mass-loaded (3.000 grams)

Area (Sd): 4.91 sq cm

DCR mode: Measure (-0.33 ohms)


QC file: CLOSED

.....

DUMP title: TW025A26 8 ohms 102687X

Press → for current or ↑ for previous

File: F:\COMMUN\COURBES\BAUD\CATALO~1\TW025A26\AXE.FRQ 12-4-2001 2:1
Sensitivity Mag - dB SPL/watt (8 ohms, @0.50 meters) (0.01 oct)

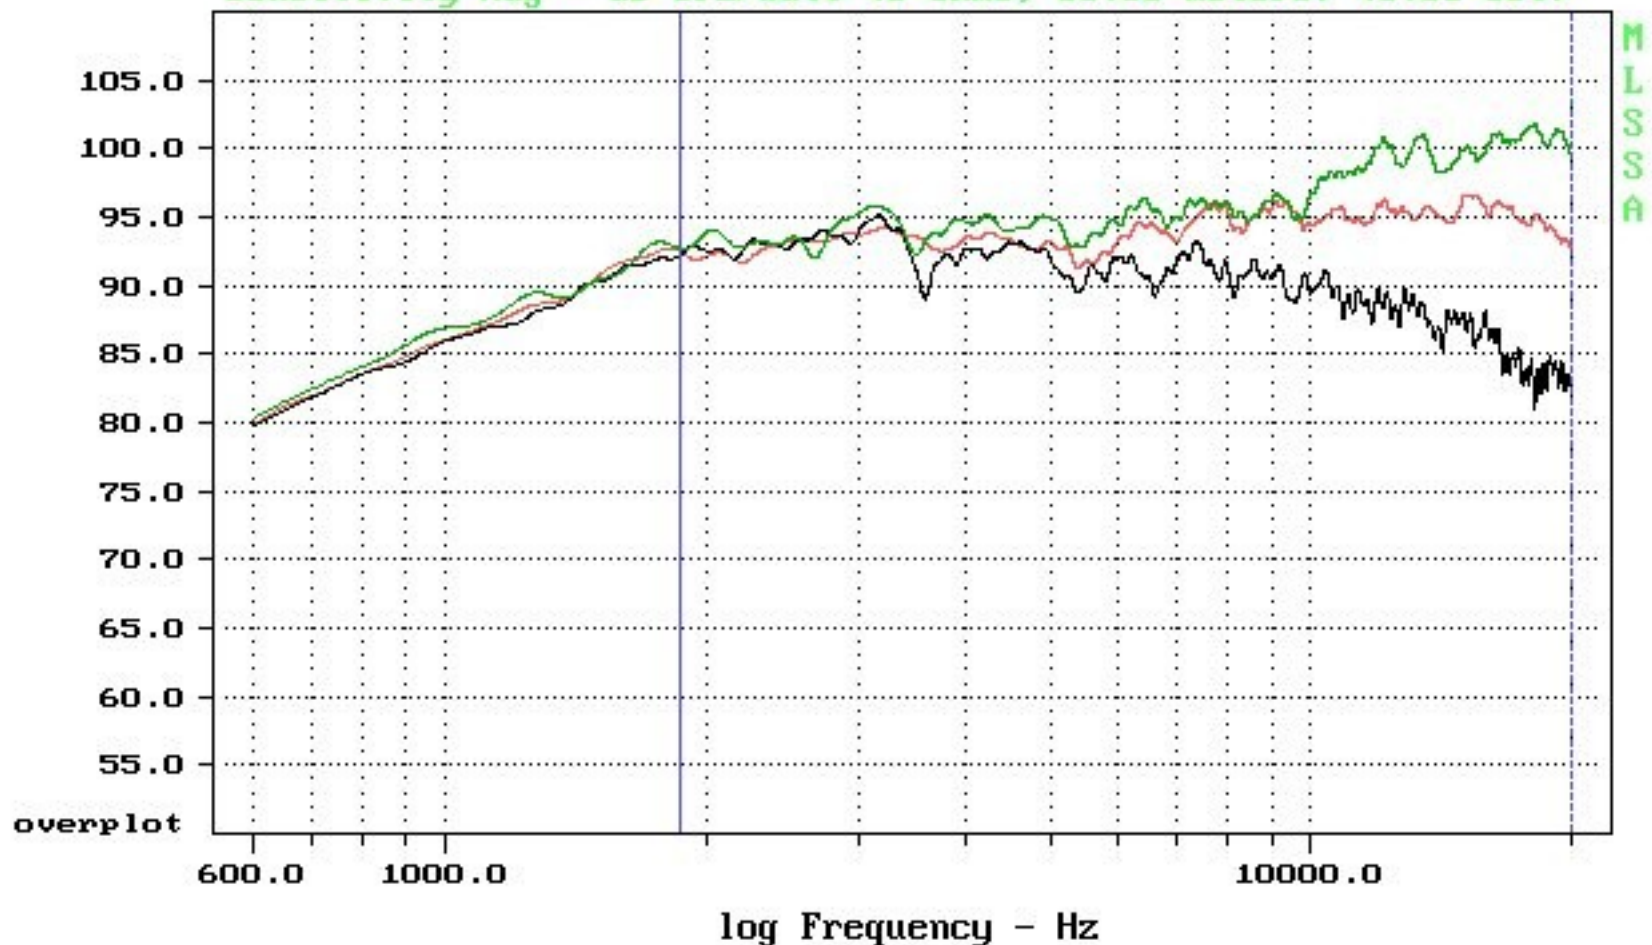


mean: 98.0026

DUMP comment: TW025A26 102687X AXIS+30°+60°


Press → for current or ↑ for previous


MLSSA: Frequency Domain

TW025A26 102687X THD 1W

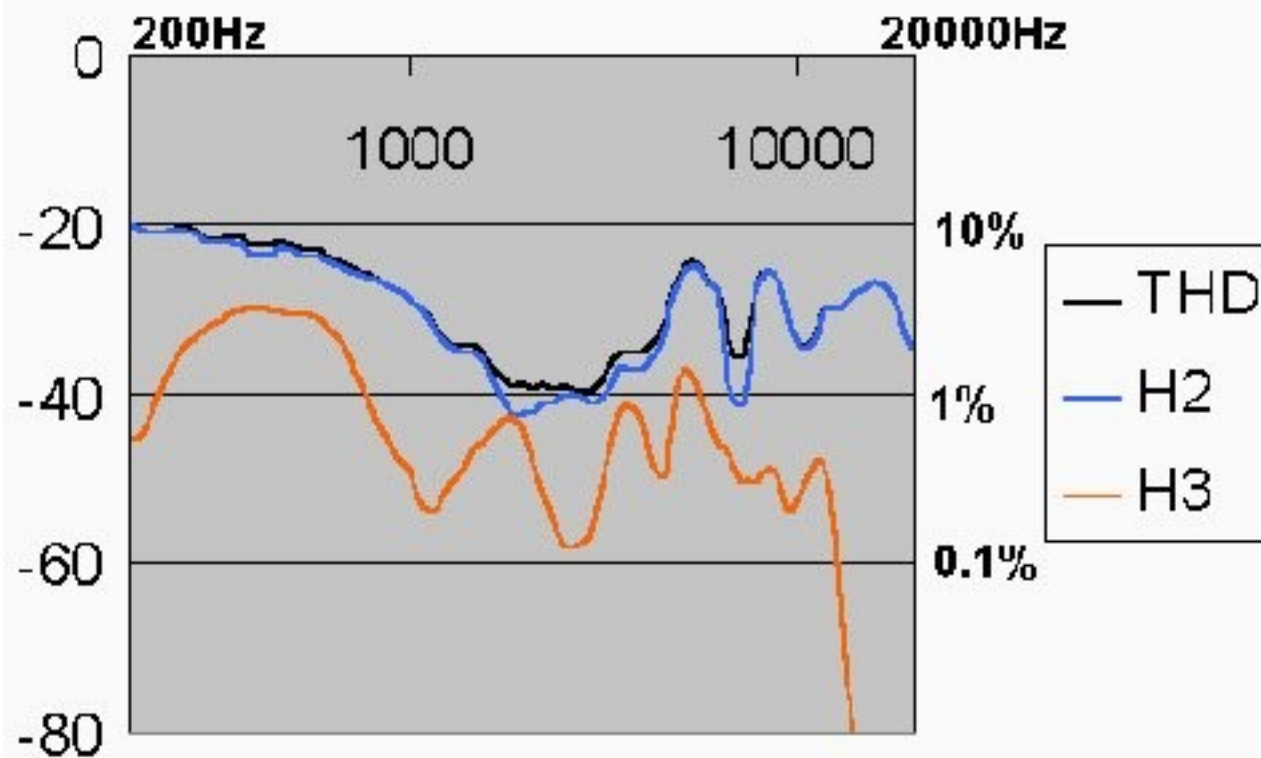

TW025A26 102687X

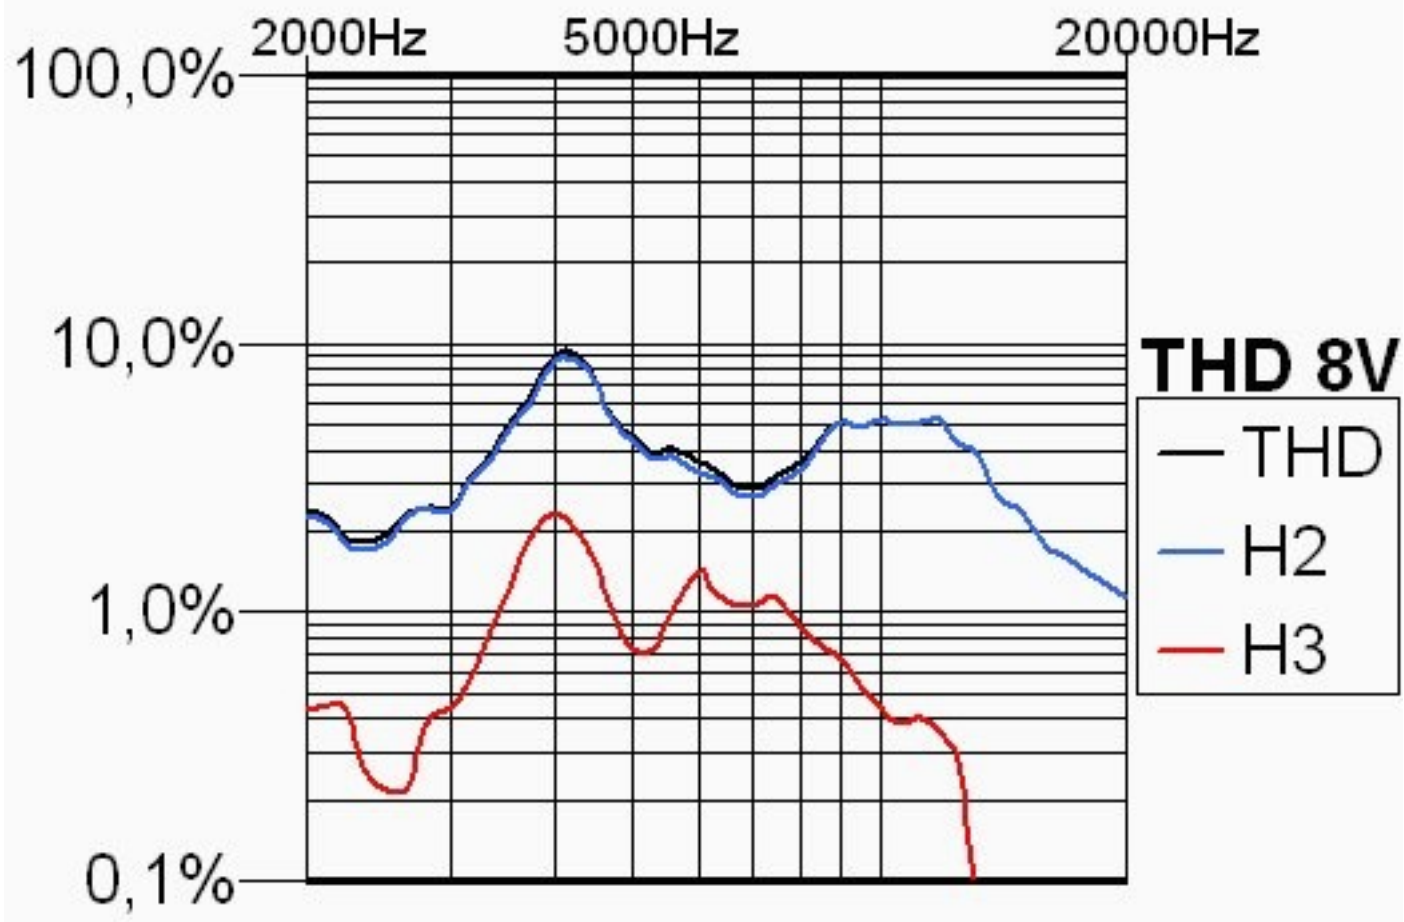

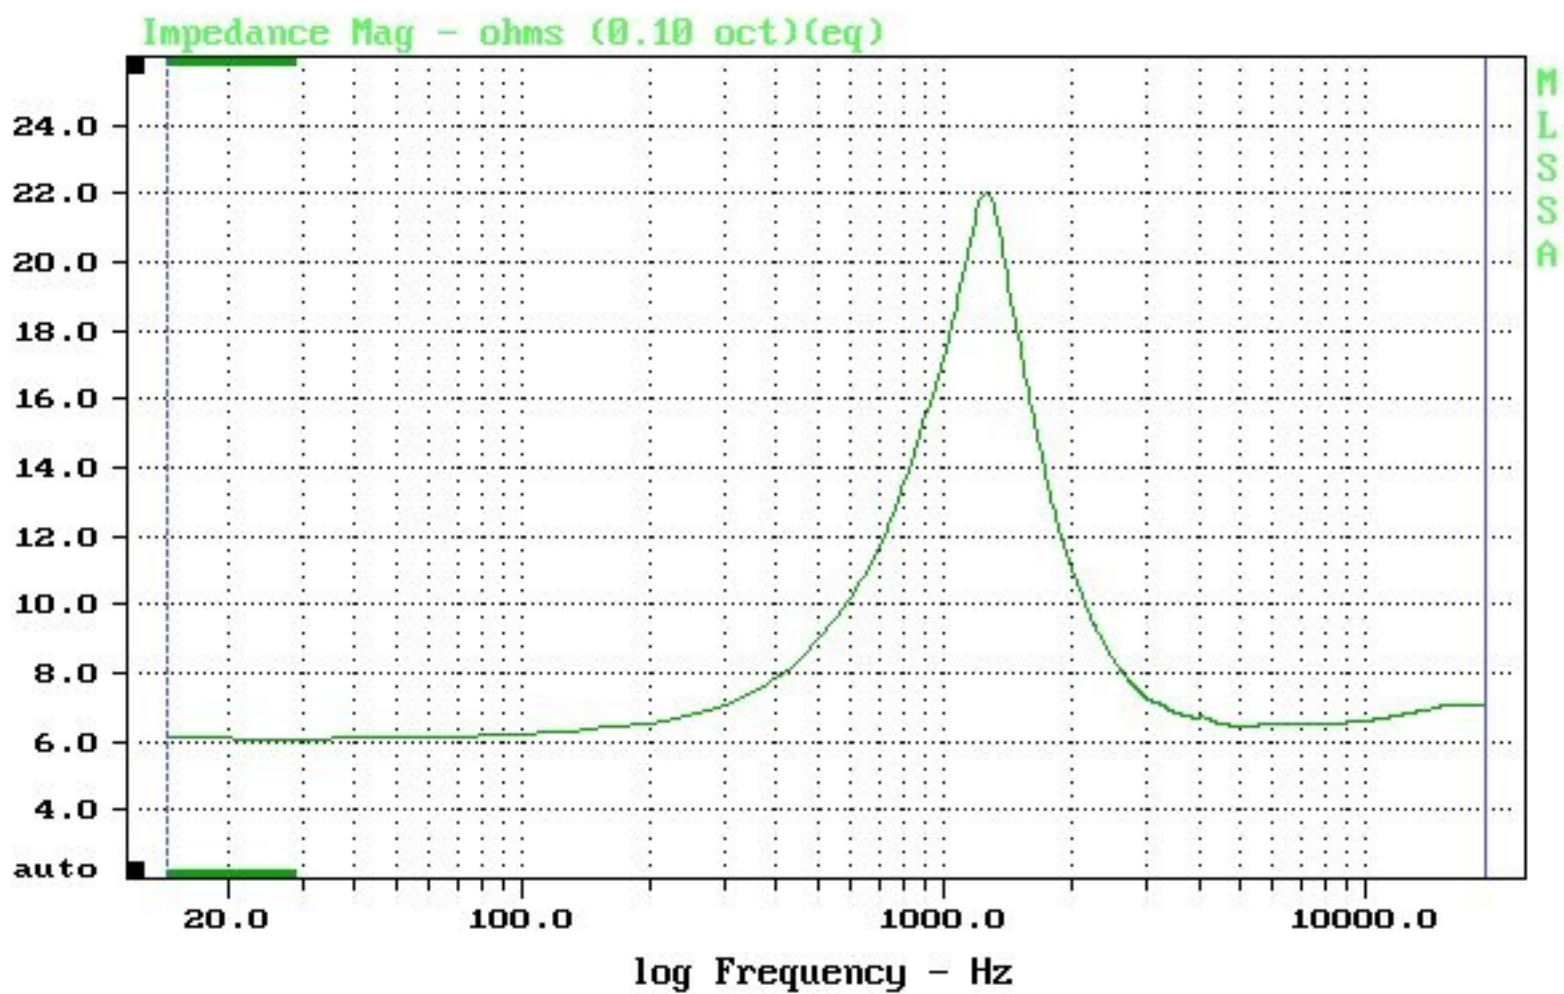


CURSOR: y = 7.09964 x = 19143.4956 (1333)

DUMP comment: TW025A26 8Ω 102687X

Press → for current or ↑ for previous

MLSSA: Frequency Domain

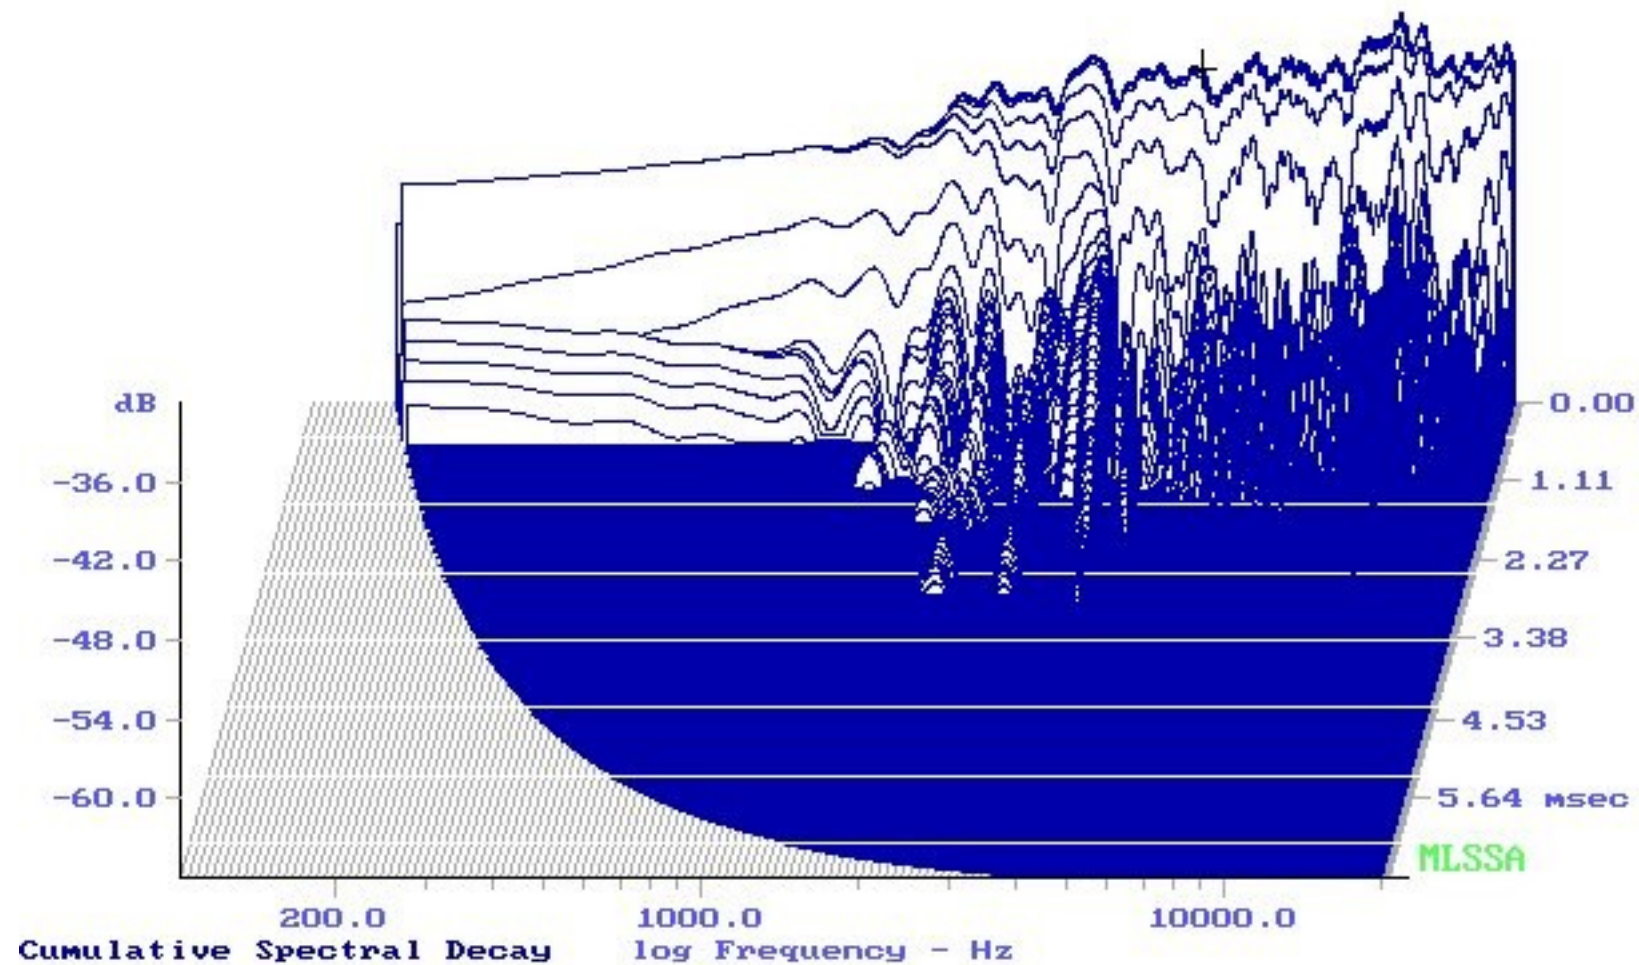

-40.81 dB, 5076 Hz (1102), 0.000 msec (1)

ESC exits, F1 prints, Shift-F1 dumps, F2 places cursor

MLSSA: Waterfall