
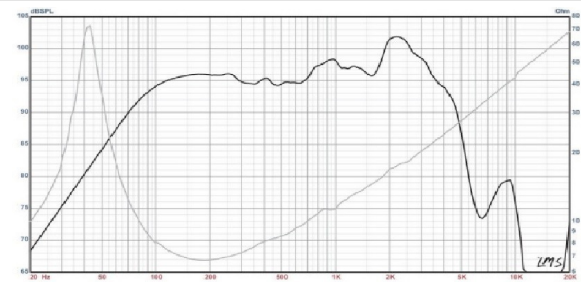


## CAD AUDIO - B12-250CX datasheet

CAD AUDIO - B12-250CX		TECHNICAL DATA CAD B12-250CX	
<p>12"/305mm high power coax unit designed for pro applications in PA and music instrument applications.</p> <p>250/500W power handling, 50mm voice coil, rugged no nonsense design are among the features</p> <p>Will work well in bass reflex enclosures 45- 70 liters</p> <p>Recommended driver is CAD D25-60 38mm, with this freq resonse is 50Hz-20 kHz</p>		Type	12" / 320mm coax driver unit
		Nominal diameter	305mm
		Nominal impedance	8 ohms
		Power handling RMS	250W
		Power handling AES	500W
		Frequency range	58Hz - 2 kHz
		Frequency range w D25-60 driver	58Hz – 20 kHz
		Sensitivity 1W 1m	97 dB
		Voice coil diameter	2" / 50mm
		Resonant frequency	43 Hz
		Total Q (Qts)	0.48
		VAS	161 ltr
		Max linear excursion	3,5mm
		Baffle cutout diameter	278mm
		Depth (without driver)	115mm
		Net weight	3,5 kg
CAD Audio DK - Røjlevej 8B - DK 5935 Bagenkop - Phone : +45 38 33 40 48 - km_cad@yahoo.com			