



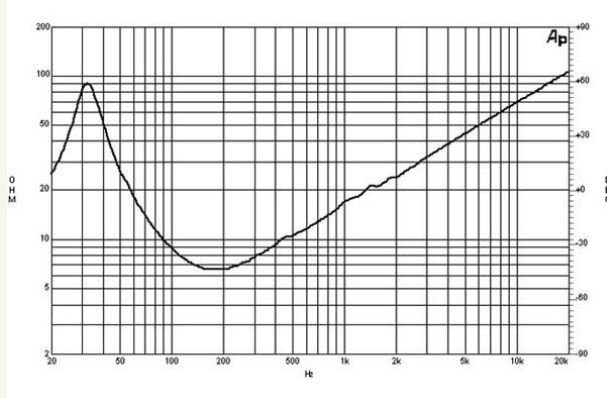

15NW100 | Subwoofer

1600 W continuous program power capacity
 100 mm (4 in) copper voice coil
 35 – 1500 Hz response
 97 dB sensitivity
 FEA optimized Neodymium magnet assembly
 Double silicone spider with optimized compliance
 Ventilated voice coil gap for reduced power compression

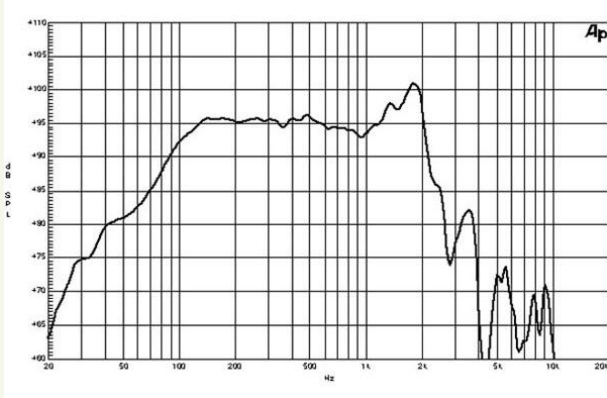

Specification

Nominal Diameter	380 (15) mm (in)
Nominal Impedance (1)	8 Ohm
Minimum Impedance	6.2 Ohm
Nominal Power Handling (2)	800 W
Continuous Power Handling (3)	1600 W
Sensitivity (1W/1m) (4)	97 dB
Frequency Range	35 - 1500 Hz
Voice Coil Diameter	100 (4) mm (in)
Winding Material	Copper
Former Material	Glass Fibre
Winding Depth	25 (1) mm (in)
Magnetic Gap Depth	12 (1/2) mm (in)
Flux Density	1.2 T

Thiele & Small Parameters

Fs	33 Hz
Re	5.1 Ohm
Qes	0.23
Qms	4.3
Qts	0.22
Vas	139 (4.9) dm3 (ft3)
Sd	855 (132.5) cm2 (in2)
Eta Zero	2.1 %
Xmax	+/- 9 mm
Xvar	+/- 11 mm
Mms	173 g g
Bl	28 Txm
Le	1.9 mH

Mounting and Shipping Info

Overall Diameter	393 mm (15.5 in)
Bolt Circle Diameter	374 mm (16.7 in)
Baffle Cutout Diameter	354 mm (13.9 in)
Depth	181 mm (7.1 in)
Flange and Gasket Thickness	16 mm (5/8 in)
Net Weight	9.0 kg (19.8 lb)
Shipping Weight	10.4 kg (22.9 lb)
Shipping Box	420x420x200 mm (16.5x16.5x7.9 in)

- ¹For different impedances, please ask.
- ²2 hours test made with continuous pink noise signal (6 dB crest factor). Power calculated on rated minimum impedance.
- ³Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
- ⁴Applied RMS Voltage is set to 2.83V for 8 ohms Nominal Impedance.

LF Drivers | LF Nd Drivers | Coaxials | HF Drivers | Horns

