



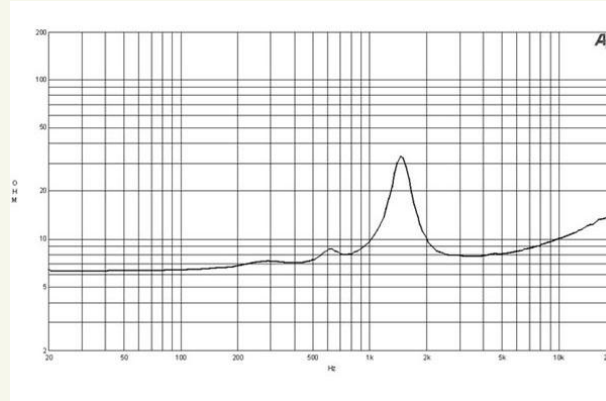

# DE12 | HF Drivers

50 W continuous program power capacity  
 1" horn throat diameter  
 36 mm (1.4 in) aluminium voice coil  
 Mylar diaphragm  
 1500 – 18000 Hz response  
 106 dB sensitivity

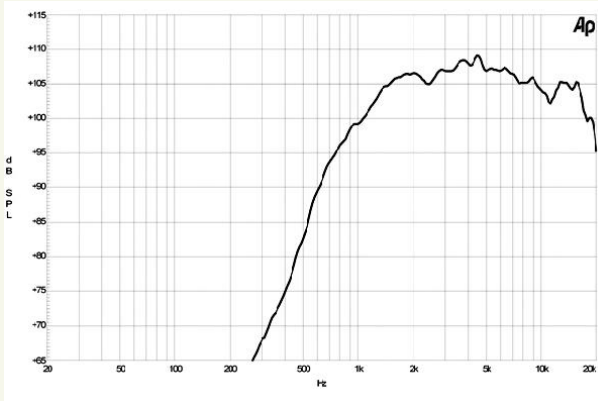

## Specifications

Throat Diameter	25 mm (1 in)
Nominal Impedance	8 ohm
Minimum Impedance	7.8 ohm
Nominal Power Handling	25 W
Continuous Power Handling	50 W
Sensitivity (1W/1m)	106 dB
Frequency Range	1.5 -18 kHz
Recommended Crossover	2.2 kHz
Voice Coil Diameter	36 mm (1.4 in)
Winding Material	Aluminium
Inductance	0.14 mH
Diaphragm Material	Mylar
Flux Density	1.45 T

## Mounting and Shipping Info

Two M5 holes 180° on 76 mm (3 in) diameter

Overall Diameter	90 mm (3.5 in)
Depth	49 mm (2 in)
Net Weight (1 unit)	1 kg (2.2 lb)
Shipping Weight (8 units)	8.9 kg (20 lb)
Shipping Box (8 units)	220x220x150 mm (8.7x8.7x5.9 in)

Horns  
 HF Drivers  
 Coaxials  
 LF Nd Drivers  
 LF Drivers

