



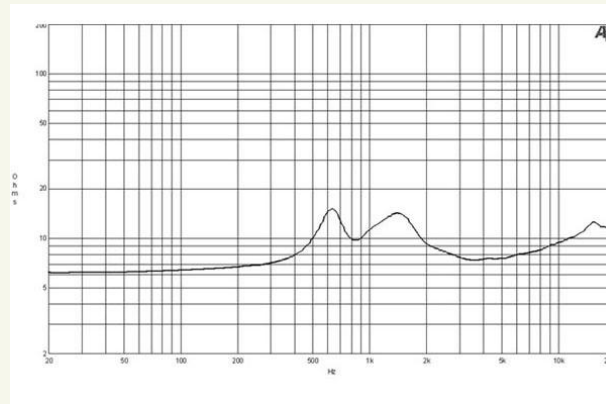

# DE200 | HF Drivers

100 W continuous program power capacity  
 1" horn throat diameter  
 44 mm (1.7 in) aluminium voice coil  
 Titanium diaphragm  
 1000 – 18000 Hz response  
 106 dB sensitivity

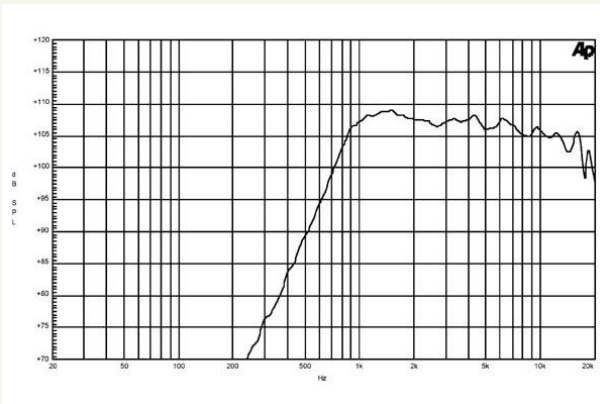

## Specifications

Throat Diameter	25 mm (1 in)
Nominal Impedance	8 ohm
Minimum Impedance	7.5 ohm
Nominal Power Handling	50 W
Continuous Power Handling	100 W
Sensitivity (1W/1m)	106 dB
Frequency Range	1 -18 kHz
Recommended Crossover	1.6 kHz
Voice Coil Diameter	44 mm (1.7 in)
Winding Material	Aluminium
Inductance	0.11 mH
Diaphragm Material	Titanium
Flux Density	1.5 T

## Mounting and Shipping Info

Two M5 holes 180° on 76 mm (3 in) diameter	
Three M6 holes 120° on 57 mm (2.2 in) diameter	
Overall Diameter	102 mm (4.0 in)
Depth	61 mm (2.4 in)
Net Weight (1 unit)	1.7 kg (3.7 lb)
Shipping Weight (8 units)	14.6 kg (32.1 lb)
Shipping Box (8 units)	230x230x160 mm (9x9x6.3 in)

Horns  
 HF Drivers  
 Coaxials  
 LF Nd Drivers  
 LF Drivers

