



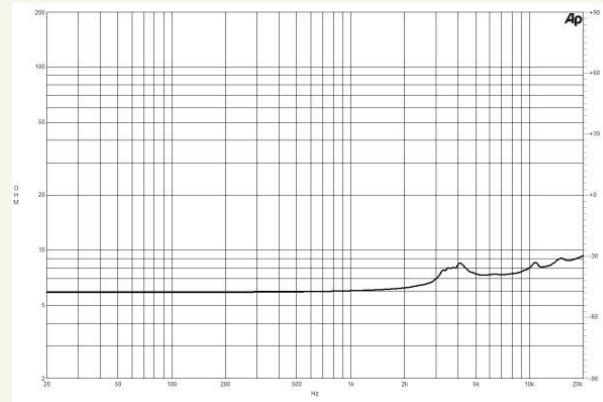

# DE35

# Tweeter

50 W continuous program power capacity  
 3500 – 18000 Hz response  
 108 dB sensitivity  
 Neodymium magnet assembly

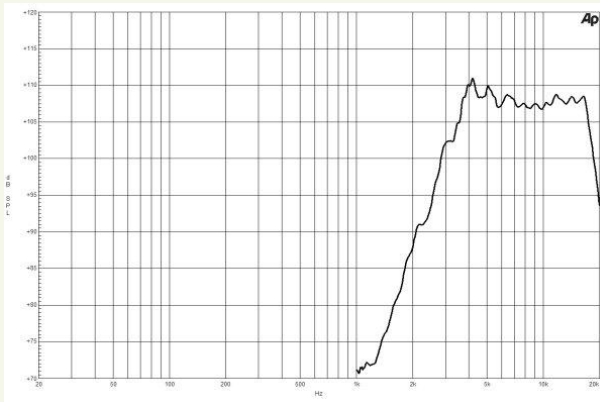

## Specifications

Nominal Impedance	8 ohm
Minimum Impedance	7 ohm
Nominal Power Handling (1)	25 W
Continuous Power Handling (2)	50 W
Sensitivity (1W/1m) (3)	108 dB
Frequency Range	3.5 - 18 kHz
Recommended Crossover (4)	5 kHz
Voice Coil Diameter	32 mm (1.25 in)
Winding Material	Aluminium
Inductance	0.1 mH
Diaphragm Material	Mylar
Flux Density	1.3 T

## Mounting and Shipping Info

Three M4 holes 120° on 91 mm  
 (3.6 in) diameter

Overall Diameter	100 mm (4 in)
Depth	46 mm (1.8 in)
Net Weight	0.7 kg (1.5 lb)

<sup>1</sup>2 hours test made with continuous pink noise signal (6 dB crest factor) within the specified range . Power calculated on rated minimum impedance.

<sup>2</sup>Power on Continuous Program is defined as 3 dB greater than the Nominal rating.

<sup>3</sup>Applied RMS Voltage is set to 2.83V for 8 ohms Nominal Impedance.

<sup>4</sup>12 dB/oct. or higher slope high-pass filter.

Horns  
 HF Drivers  
 Coaxials  
 LF Nd Drivers  
 LF Drivers

