
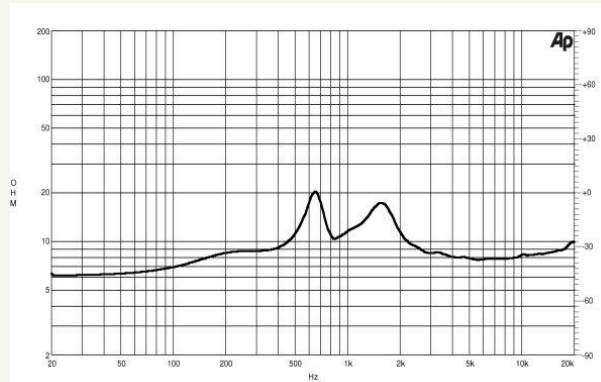


DE400TN | HF Drivers

100 W continuous program power capacity
 1" horn throat diameter
 44 mm (1.7 in) aluminium voice coil
 Titanium diaphragm
 1200 – 18000 Hz response
 106 dB sensitivity

Compact Neodymium magnet assembly with shorting copper cap

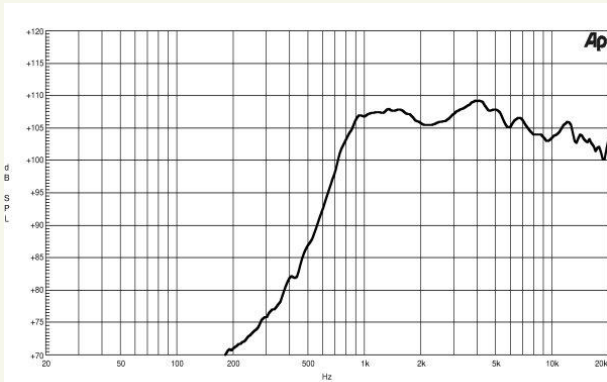

Specifications

Throat Diameter	25 mm (1 in)
Nominal Impedance	8 ohm
Minimum Impedance	7.7 ohm
Nominal Power Handling	50 W
Continuous Power Handling	100 W
Sensitivity (1W/1m)	106 dB
Frequency Range	1.2 -18 kHz
Recommended Crossover	1.5 kHz
Voice Coil Diameter	44 mm (1.7 in)
Winding Material	Aluminium
Inductance	0.11 mH
Diaphragm Material	Titanium
Flux Density	1.8 T

Mounting and Shipping Info

Two M6 holes 180° on 76 mm (3 in) diameter	
Overall Diameter	85 mm (3.3 in)
Depth	44 mm (1.7 in)
Net Weight (1 unit)	0.8 kg (1.8 lb)
Shipping Weight (8 units)	6.7 kg (14.7 lb)
Shipping Box (8 units)	220x220x150 mm (8.7x8.7x5.9 in)

Horns
 HF Drivers
 Coaxials
 LF Nd Drivers
 LF Drivers

