





HP100GO

Impedance	6 ohms	V.C. Diameter	25 mm
Fs	68 Hz	V.C. Length	9.4 mm
RMS Power (iec)	30 W	V.C. Material	copper
Sensitivity (2.83V/1m)	87.0 dB	V.C. Layers	2
Re	5.7 ohms	Wire Type	round
Le	0.57 mH	BL	5.07 NA-1
Xmax	± 2.7 mm	Mms	4.48 gr
Qms	1.81	Cone	treated paper
Qes	0.41	Surround	rubber
Qts	0.34	Frame	polymer
Vas	4.33 l	Net Weight	0.62 kg

Response Curve

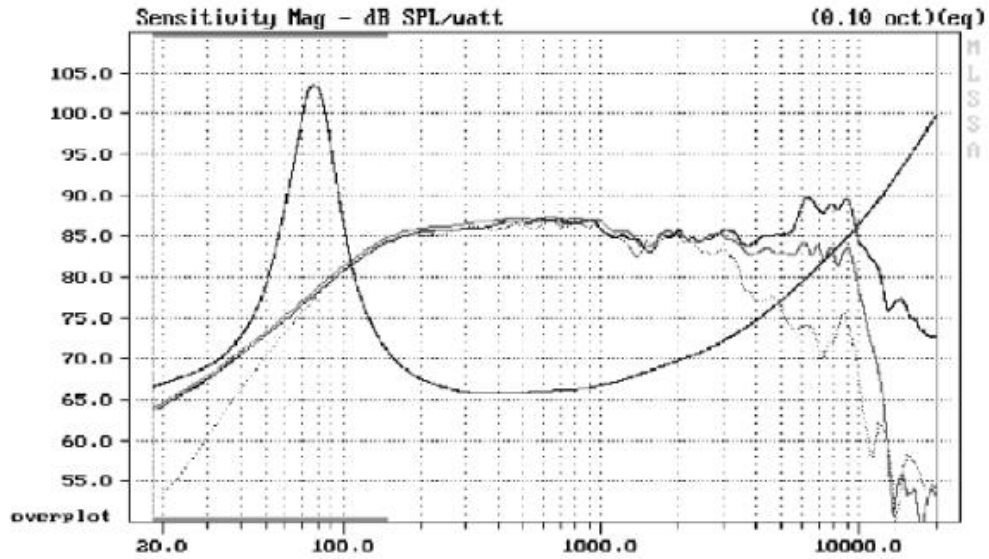

Spectral Decay Plot

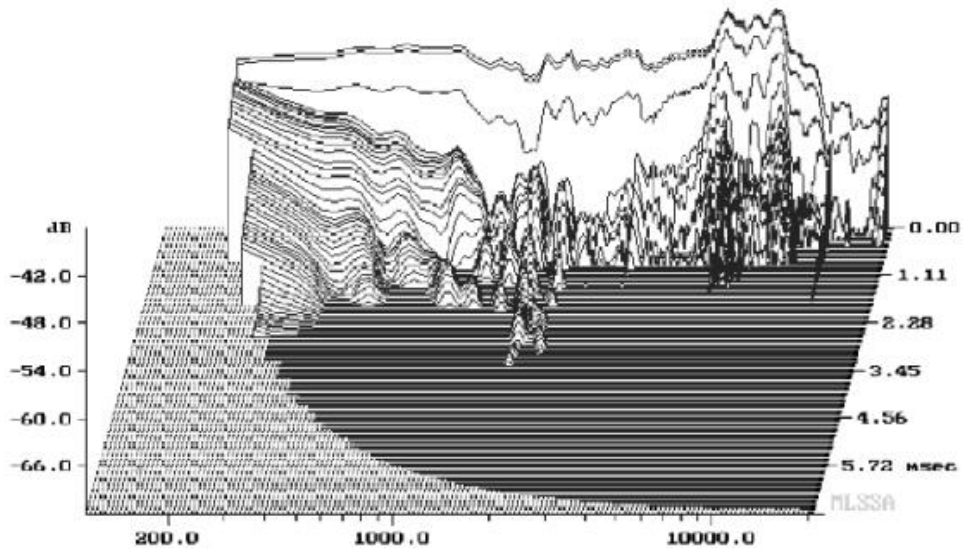

Dimensions in mm

