



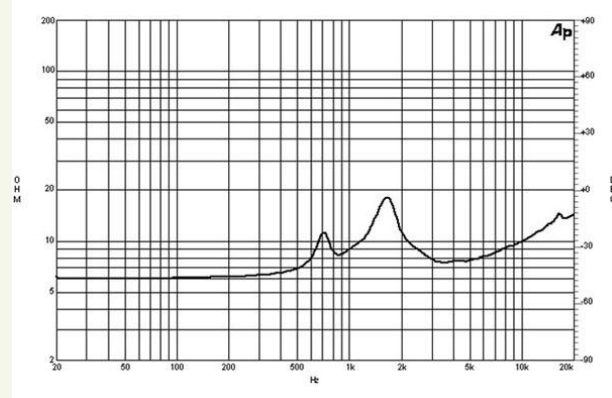

# DE160 | HF Drivers

80 W continuous program power capacity  
 1" horn throat diameter  
 44 mm (1.7 in) aluminium voice coil  
 Mylar diaphragm  
 1500 – 18000 Hz response  
 107 dB sensitivity

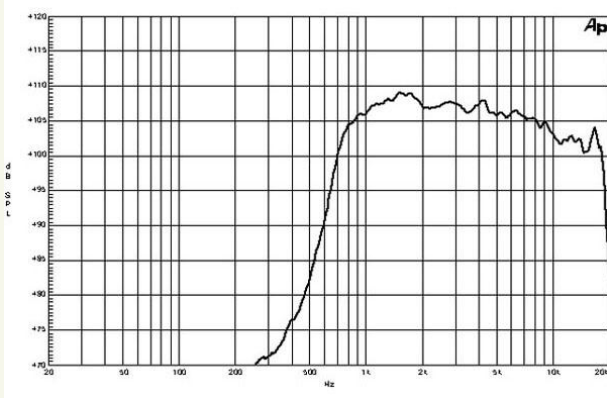

## Specifications

Throat Diameter	25 mm (1 in)
Nominal Impedance	8 ohm
Minimum Impedance	7.4 ohm
Nominal Power Handling	40 W
Continuous Power Handling	80 W
Sensitivity (1W/1m)	107 dB
Frequency Range	1.5 -18 kHz
Recommended Crossover	2 kHz
Voice Coil Diameter	44 mm (1.7 in)
Winding Material	Aluminium
Inductance	0.11 mH
Diaphragm Material	Mylar
Flux Density	1.5 T

## Mounting and Shipping Info

Two M6 holes 180° on 76 mm (3 in) diameter

Overall Diameter	102mm (4.0 in)
Depth	61 mm (2.4 in)
Net Weight (1 unit)	1.6 kg (3.5 lb)
Shipping Weight (8 units)	13.9 kg (30.6 lb)
Shipping Box (8 units)	220x220x150 mm (8.7x8.7x5.9 in)

Horns  
 HF Drivers  
 Coaxials  
 LF Nd Drivers  
 LF Drivers

