


DELTA 1104A PWM Amplifier

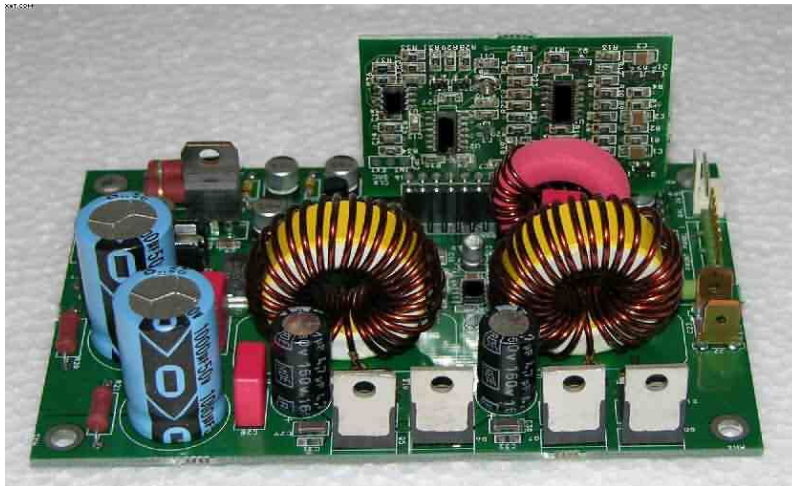

DELTA 1104A is a class-d power amplifier.

DELTA 1104A is new amplifier in our DELTA range of amplifiers, a new topology combining the best of analog amplifier design with class-d/switching amplifiers.

DELTA 1104A offers a versatile and compact solution for many applications in the audio field.

DELTA 1104A is rated at 1000W into 4 ohms and has several means of protecting the amplifier and the load, overcurrent protection, thermal overload protection, soft-start etc. etc.

The DELTA range of amplifiers offer very high audio quality with very good specs, stability and square wave reproduction, EMI and noise is very good as well.

Amplifier specification	
Rated power 4 ohms	1000 W
Power supply	2 x 45VDC (+ 18V)
Freq. Range (+0, -1dB)	15 – 30.000 Hz
THD + N	0.02% typ.
Dynamic Range	110 dB typ.
Max. output current	30A
Min. load impedance	4 ohms
Damping Factor	400 typ.
Input voltage	1V - 10 k balanced/unbalanced
Operation	Full bridge amplifier
Overload protection, thermal protection	Yes , yes
Dimensions	120 x 80 x 30mm
Heatsink	External

DELTA 1104A PWM Amplifier


Header specifications.

Power Input	
1	+45V
2	GND
3	-45V
4	(+18VDC)

Speaker Outputs	
1	+ Out CH1
2	-Out CH1


Inputs	
1	+IN
2	-IN
3	GND
4	VOL SEND
5	GND
6	VOL RETURN
7	INV INPUT
8	INV OUTPUT

Performance Graphs

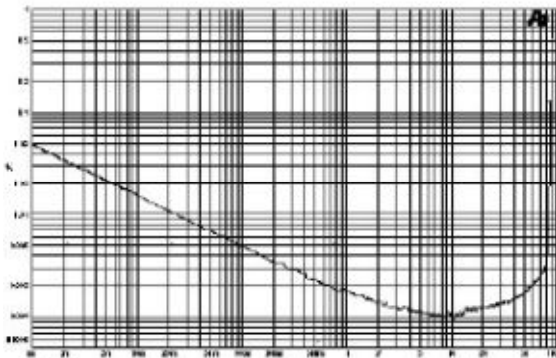


THD vs. Power Output , SE 4 ohms


DELTA 1104A PWM Amplifier

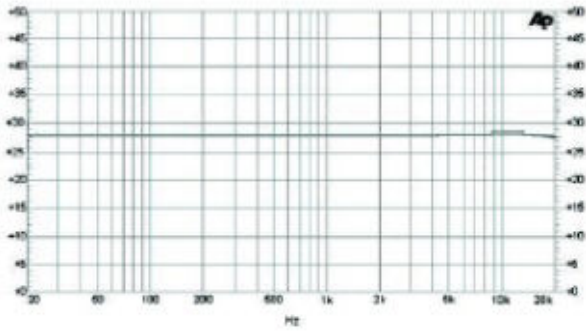

Freq Response 4 ohms

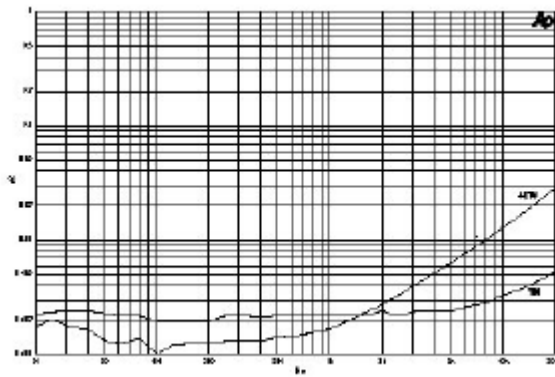

THD + N vs. Frequency – 4 ohms

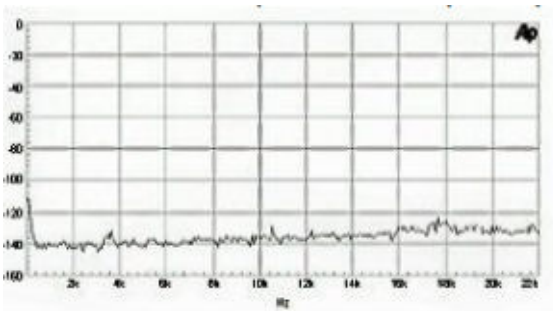

Noise floor,